



# IPX-YGR-LC

Small Desktop X-ray Generator+IP Laue Camera

**Small Compact**



- ☆ Safety device
- ☆ Output 1.5kw
- ☆ X-ray Tube (W)



Good for "Laue Camera combined IP reader"

Small Compact , Exclusive Point focus

※ Appearance will be specification change without notice.

Unit	Item	Spec
Xray Generator	Output	1.5kw(Can be changed to 2kw)
	Xray Tube	W
	Xray shutter	Timer is controlled by PC
	Safty	F.S.
		Signal Tower
	Size	App. W625mmxD660mmxH1120mm (Inc.signal tower)
Weight	App. 150kgs	
Laue Camera	Main Body	Combined IP Reader
	ControlBOX	Installed Outside
	IP Size	8cmx12cm
	Collimater	φ0.5,Combined IP Casette
	Pixel Resolution	50um,100μm,200m
	Reading Time	app. 1.5min~
	IP Erasing Time	app.1min~
	PC(option)	Windows 11
	Weight	App. 30kgs
Softwares	Imaging Reader Software	IPX-Ray
	Orienteering Software	IPX-Converter
Power Suply	Xray Generator	Single Phase 220V 20A earthing 100Ω under
	Laue Camera	Single Phase 220V 1A earthing 100Ω under
Unit Stand		app.W750mm x D750mm X H740mm

※ Appearance will be specification change without notice.

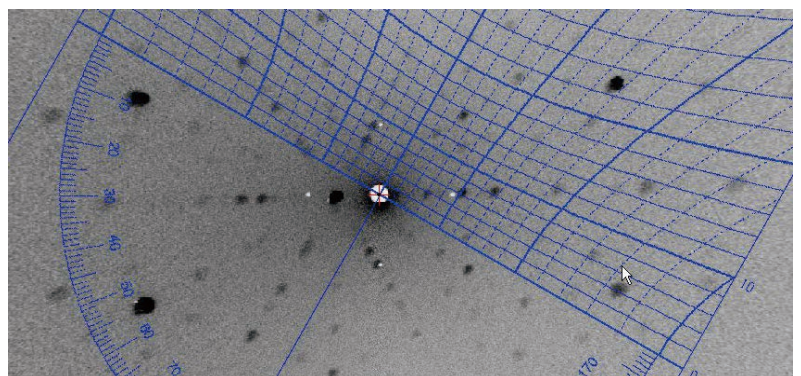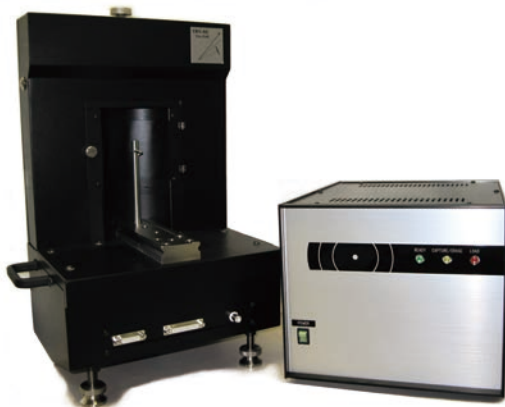

IPX Co.,Ltd.  
 Representative Director Toshiyuki Shimura  
 2-9-5 Koufuudai Toyono-chou Toyono-gun Osaka  
 563-0104 Japan  
 TEL: +81-72-734-6867 eFAX: +81-72-344-5589  
 E-mail: t-shimura@ipx-laue.com  
 URL: <http://www.ipx-laue.com/>

\*\*\*\*\*