



IPX-YGR-LC

Small Desktop X-ray Generator+IP Laue Camera

Small Compact



- ☆ Safety device
- ☆ Output 2kw
- ☆ X-ray Tube (W)



Good for "Laue Camera combined IP reader"

Small Compact , Exclusive Point focus

※ Appearance will be specification change without notice.

Unit	Item	Spec
Xray Generator	Output	2KW
	Xray Tube	W
	Xray shutter	Timer is controlled by PC
	Safty	F.S.
		Signal Tower
	Size	App. W620mm x D660mm X H1120mm
Weight	App. 150kgs	
Laue Camera	Main Body	Combined IP Reader
	ControlBOX	Installed Outside
	IP Size	8cmx12cm
	Collimater	φ0.5,Combined IP Casette
	Pixel Resolution	50um,100μm,200m
	Reading Time	app. 1.5min~
	IP Erasing Time	app.1min~
	PC(option)	Windows 10
	Weight	App. 30kgs
Softwares	Imaging Reader Software	IPX-Ray
	Orienteering Software	IPX-Converter
Power Suply	Xray Generator	Single Phase 220V 20A earthing 100Ω under
	Laue Camera	Single Phase 220V 1A earthing 100Ω under
Unit Stand		app.W600mm x D630mm X H630mm

※ Appearance will be specification change without notice.

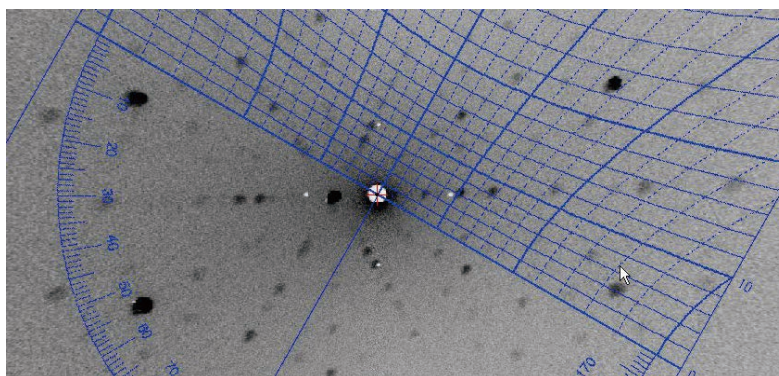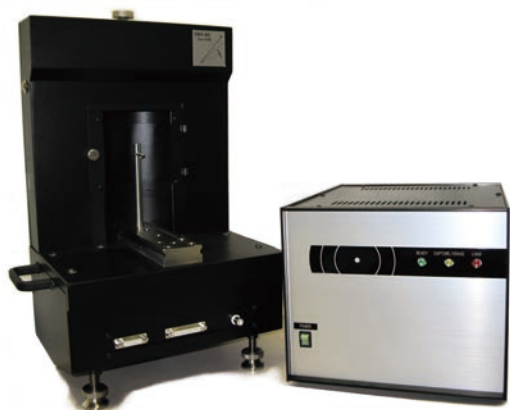

IPX Co.,Ltd.
 Representative Director Toshiyuki Shimura
 2-9-5 Koufuudai Toyono-chou Toyono-gun Osaka
 563-0104 Japan
 TEL: +81-72-734-6867 eFAX: +81-6-7635-9105
 E-mail: t-shimura@ipx-laue.com
 URL: <http://www.ipx-laue.com/>
